

New Single wired audio cables in stainless sheath:“SORANE”

Products Guide

November 01, 2015
IT Industry Co., Ltd.

Products: The phono OFC cables made with a single wire of $\phi 0.6$ under the new brand of “SORANE” by IT Industry.



(RCA > RCA)



(XLR M > XLR F)



(L-DIN 5p > RCA)



(DIN 5p > RCA)




(L-DIN 5p > XLR M)



(DIN 5Pp > XLR M)

- So far almost all of the audio cables are made with a bundled wire twisting some thin wires of $\phi 0.26$ and/or $\phi 0.12$. We have been having an idea since 1970 when the analog audio had enjoyed the Golden age that the best analog audio cables should be made with a single wire if the best sound should be pursued. In the meantime, we were afraid that in case of a single wire it may be easily bent or cut while plug in and plug out. However, when we saw an optical cable shielded by a stainless tube ring many years ago, the good idea hit on us that we will be able to make single wired audio cables by using a wire of $\phi 0.5$ - $\phi 0.6$ shielded with a flexible stainless tube ring. Since this idea hit on us, we have spent many years to develop and test repeatedly, and finally we could succeed in making the final products after many trials and errors as a result.

- As per the following specifications, an OFC wire of $\phi 0.6$ is covered with an elastic protection tube and then two OFC wire tubes are set manually in a shielded braid and fixed with RCA pins solidly by soldering with plus (+) & minus (-) in a shielded braid, and then covered by a flexible stainless sheath with vinyl coating. With our own technology, we could develop a single wired audio cable using a highly purified OFC materials. This cable connectable between tonearms and phono stages or all the interconnections in-between will offer you the best solution to enjoy a natural sound.
- The connecting pins are made through the process of the bright Rhodium plating and assembled with the Teflon-lined connectors so that the isolation is highly secured. We sincerely wish all the listeners will be able to enjoy the pure sound.

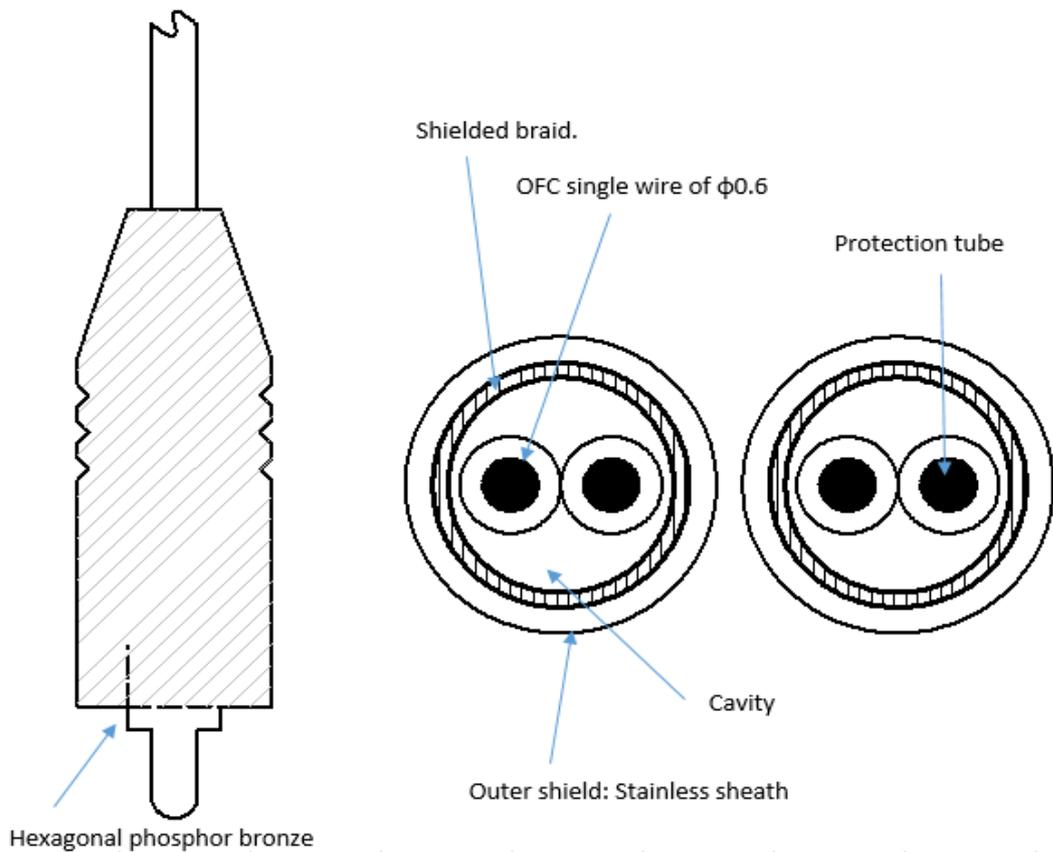

Specifications;

- **The phono shielded OFC cables made with two core coaxial wires using a Single wire of $\phi 0.6$ & covered in a flexible stainless sheath.**
- **6 kinds of cables available:**
 - 1) **Model: “KSC-221-100RR” : 1.0 M (RCA > RCA)**
 - 2) **Model: “KSC-221-100XLR-XLR” : 1.0 M (XLR Male > XLR Female)**
 - 3) **Model: “KSC-221-120D-XLR” : 1.2 M (Straight DIN > XLR Male)**
 - 4) **Model: “KSC-221-120DR” 1.2 M (Straight DIN > RCA)**
 - 5) **Model: “KSC-221-120DLR” : 1.2 M (L-Angle DIN > RCA)**
 - 6) **Model: “KSC-221-120DL-XLR” : 1.2 M (L-Angle DIN > XLR Male)**

The specifications shall be changed without notice.
